



Manual and electronic locking access gates and custom filler barriers can be fabricated to match any of our full-height turnstiles. Standard width for passage gates is 36" and customized widths are available – just give us a call.

HT 336-ADA

Manual Passage Gate

304 Stainless, No. 4 Satin finish (shown)

Also available in hot-dipped galvanized or powder coat finishes.



HAYWARD
TURNSTILES, INC.

The New Standard in Secure Access Systems

Manual Passage Gate • Interior & Exterior Application

Applications:

Ideal for controlling orderly flow of foot traffic in both indoor and outdoor settings (matching gate to our High-Security Full-Height Single and Tandem Turnstiles)

Product Features:

Materials and Finishes available in your choice of:

- Hot dipped galvanized carbon steel
- Polyester enamel on carbon steel (standard color is black/ other colors available upon request)
- Our signature 304 Stainless steel/ No. 4 satin finish

Design & Construction:

- Designed for secure operation with aesthetics in mind
- Featuring fully welded exterior components
- Minimal exposed hardware
- Heavy gauge materials meeting ASTM standards

Measures:

HT 336-ADA

Size of opening (pedestrian clearance)
36" (914mm)

Frames and Door Jam
2" x 2" (51mm x 51mm) 11 gauge box tubing

Exterior Height

91" (2331mm)

Interior Height

88 1/2" (2248mm)

Interior Tubing Sizes


1 1/2" Diameter 14 gauge (2248mm)

1 3/4" Diameter 14 gauge (44mm)

1 3/4" Diameter 11 gauge (44mm)

Features:

- Swing Gate is equipped with outdoor rated electronic strike lock and automatic door closer
- Keylock - Control direction of travel manually by key (to lock or unlock), or may be used to override electronic controls.

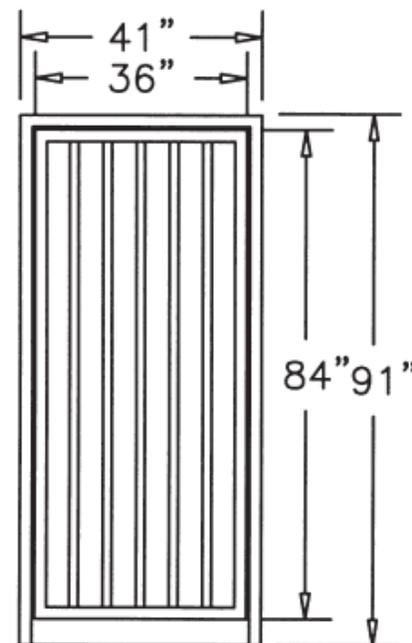

Electrical Specifications:

Command module input 110-240 VAC (2 amp-1 amp) 50-60 Hz; control voltage 24 VDC. All electrical components are UL recognized and CSA certified.

Standards and Codes:

Austenitic stainless steel:
ASTM A240, A249, A276
Hot rolled steel:
AISI C-1020, AISI C-1018
Hot dipped galvanizing:
ASTM A-143, ASTM A-153-80
Stainless steel fasteners:
ASTM A-320
American Welding Society (AWS)
Standard D 1.1

Warranty:

Units are warranted against defects in materials and workmanship for a period of one year from date of delivery. See warranty information for specific details.

Matching Full Height Turnstiles Available in Single and Twin Models



The New Standard in Secure Access Systems

160A Wampus Lane • Milford, CT 06460 • Ph: (203) 877-7096 • Fax: (203)877-7097

E-mail: info@haywardturnstiles.com or sales@haywardturnstiles.com • www.haywardturnstiles.com