

# HT 400T Full Height Turnstiles Twin Full Height Turnstiles

**HT427T**

**HT430T**

## Full Security for Everyone's Needs

The HT 400T Series of Twin Full Height Turnstiles are engineered to meet all your security and access control requirements. Used as either stand alone units or as part of a fully integrated security control package, these turnstiles will not only fit your needs but your budget as well.



**Dollar for dollar, Hayward Turnstiles are simply the best turnstile value in the access control industry.**

We have engineered our turnstile products line with your needs in mind: Performance, aesthetics, reliability, and ease of maintenance.

In addition to turnstile and crowd control products, we offer design assistance for new installations, as well as custom fabricated devices.

Hayward Turnstiles provides access control systems regionally, nationally, and worldwide.

Contact us for more information about the new generation of turnstiles offered by Hayward Turnstiles.

## Dimensions:

	Depth	Width	Passage Width	Passage Height	Overall Height
	A*	B*	C*	D*	E*
<b>HT427 T</b>	54" 1372mm	94" 2388mm	27" 686mm	84" 2134mm	91" 2311mm
<b>HT430 T</b>	56" 1422mm	102" 2591mm	30" 762mm	84" 2134mm	91" 2311mm

\* See CAD drawings on reverse side.



The New Standard in Secure Access Systems

160A Wampus Lane • Milford, CT 06460 • Ph: (203) 877-7096 • Fax: (203)877-7097

E-mail: [info@haywardturnstiles.com](mailto:info@haywardturnstiles.com) or [sales@haywardturnstiles.com](mailto:sales@haywardturnstiles.com) • [www.haywardturnstiles.com](http://www.haywardturnstiles.com)

# HT 400T Full Height Turnstiles

## Twin Full Height Turnstiles

HT427T

HT430T

### Applications:

The HT 400T Series Full Height Twin Turnstiles are ideal for both indoor and outdoor settings. Wherever control of pedestrian traffic is necessary, these full height turnstiles will perform flawlessly.

### Product Features:

Materials and finishes available in your choice of:

- Hot Dip Galvanized Steel
- Powder Coat over Steel
- 304 Stainless Steel with a No. 4 Satin Finish

### Design & Construction:

- Designed for secure operation with aesthetics in mind
- Fully welded exterior components
- Features minimal exposed hardware
- All material meets ASTM standards

### Controller & Access Control Operation:

- Self centering control head with adjustable hydraulic shock suppression
- Hardened tool steel locking bars, cam & roller assemblies
- Permanently lubricated bearings
- Available in clockwise, counter clockwise or bi-directional passage

### Electronic Control Head Configurations:

- Access Controlled entry & exit direction
- Access Controlled in one direction and uncontrolled in the other direction
- Access controlled in one direction and no passage in the other direction

### Dimensions:

(see drawings to right and dimensions on front page)



- Exterior Height: 91"
- Width: 94" and 102"
- Pedestrian Clearance: 27" or 30"

### Options:

- Electronic locking module featuring heavy duty 24 VDC solenoids and card reader interface
- Available as Fail-Safe (free passage on power failure) or Fail-Lock (locked passage on power failure)
- Can interface with card readers, computer attendance systems, coin or token acceptors, push buttons, wireless remote controls and metal detectors
- Electronic 6 digit resettable counter with LCD display and ten year lithium battery
- Vertical Graphic Array (VGA) showing red "X" / green arrow
- Additional options available on request

### Manual Control Head Configurations:

- Uncontrolled passage in both directions
- Uncontrolled passage in one direction and no passage in the other direction
- Key controlled traffic in each direction

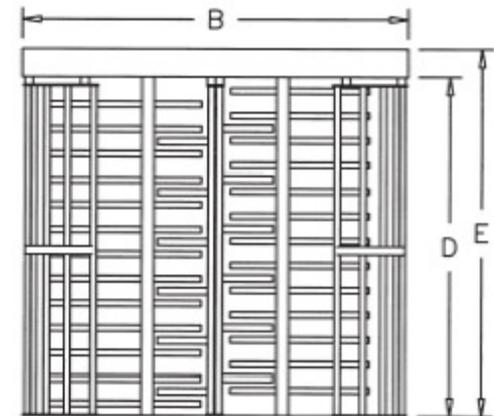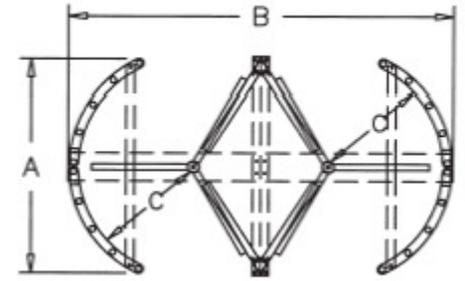

### Electrical Specifications:

- Command Module input 110-240 VAC (2amp-1amp) 50-60 Hz stepped down to a safe 24 VDC output (UL recognized and CSA certified)

### Warranty:

- Units are warranted against defects in materials and workmanship for a period of one year from date of delivery. See warranty information for specific details



The New Standard in Secure Access Systems

160A Wampus Lane • Milford, CT 06460 • Ph: (203) 877-7096 • Fax: (203)877-7097

E-mail: [info@haywardturnstiles.com](mailto:info@haywardturnstiles.com) or [sales@haywardturnstiles.com](mailto:sales@haywardturnstiles.com) • [www.haywardturnstiles.com](http://www.haywardturnstiles.com)